

US Serial No. 10/530372
Page 6 of 16

Remarks:

Priority:

The applicant thanks the Office for acknowledging receipt of the priority documents which have been placed of record in the file.

Withdrawal of Objections/Rejections:

The applicant thanks the Examiner for withdrawing the objections of claims 1-20, as well as the rejection of claims 1-20 under 35 USC § 112 2nd paragraph, as well as the rejection under 35 USC § 102(b) of claims 1-7, 10-17, and 20 in view of US 4,767,563.

Regarding the rejection of claims 1, 2, 4-7, 10, 12, 14-17 and 20 under 35 USC § 103(a) in view of US 4,758,377 to Iding (hereinafter simply "Iding"), in view of WO 96/35771 to Thomas Weibel (hereinafter simply "Weibel").

The applicant traverses the rejection of these claims in view of the combined references to Iding and Weibel. The applicant respectfully traverses the argumentation raised by the Examiner with regard to the alleged "obviousness" of the combined ability of the Iding and the Weibel references.

The Examiner's rejection seems to be premised upon the belief that the combined ability of the clay as taught by the Weibel reference into the Iding compositions would be one which is readily achieved without the exercise of an inventive step. The applicants disagree.

First, with regard to the appropriate combined ability of these references, the Office is reminded that a hindsight reconstruction is an inapplicable and an inappropriate basis for a 35 USC § 103(a) rejection. The proper burden of proof to present and maintain the rejection under 35 USC 103(a) as outlined in M.P.E.P. Sec. 2143 and in the law. The applicant contends that the Examiner's grounds of rejection is at, at best, a hindsight reconstruction, using applicant's claim as a template to reconstruct the invention by

US Serial No. 10/530372
Page 7 of 16

picking and choosing amongst isolated disclosures from the prior art. This is impermissible under the law. For example, in *In re Fritch*, 972 F.2d 1260, 1266, 23 USPQ2d 1780, 1784 (Fed. Cir. 1992), the Federal Circuit stated:

"It is impermissible to use the claimed invention as an instruction manual or "template" to piece together the teachings of the prior art so that the claimed invention is rendered obvious. *In re Gorman*, 933 F.2d 982, 987, 18 USPQ2d 1885, 1888 (Fed. Cir. 1991). This court has previously stated that "[o]ne cannot use hindsight reconstruction to pick and choose among isolated disclosures in the prior art to deprecate the claimed invention." (quoting *In re Fine*, 837 F.2d at 1075, 5 USPQ2d at 1600)

With regard to the Iding reference, as is properly pointed out by the Examiner this document is directed towards a thickened composition which uses as its sole thickening constituent, a high molecular weight polyacrylate constituent having a molecular weight in the range of about 0.5 – 1.5 million. (See Iding, column 4, lines 37 – 57.) Indeed, reviewing later in the Iding compositions, several examples are provided beginning at column 5, line 52. As is seen therein, the Iding compositions rely solely upon the use of a polyacrylate base thickener as the solitary thickening constituent in those compositions. For example, in Example 1, "Sokalan PHC—25" is recited. In Example 2, Sokalan PHC—25 is again the sole thickening constituent which is recited. Interestingly, in that Example 2 the addition of a further constituent appears to have an effect on boosting the viscosity of that composition. Most interestingly, the nonionic constituent, Neodol 45—7 appears to raise the viscosity four-fold, while the addition of later constituents appears to reduce this viscosity until the addition of sodium hydroxide and later, the inorganic abrasive additive. Thus, it appears that from this example, the Iding reference contemplates that an interaction between the sodium hydroxide, surfactant, and the polyacrylate-based thickener is an essential feature of the invention. This appears to be also borne out by Example 3 wherein a different polyacrylate thickener, here "Acrysol ICS—1" is used. Again, it appears that viscosity increases are most pronounced upon the addition of the nonionic surfactant, followed by the addition of the sodium hydroxide constituent. Quite pertinently, the fact that the polyacrylate-based thickeners appear to work in conjunction with the nonionic, and the sodium hydroxide underlies the fact that

US Serial No. 10/530372
Page 8 of 16

as a sufficient viscosity is achieved in order to provide a "clinging" effect of vertical surfaces (Iding, column 4, line 54 – 57) there appears to be no motivation for the addition of any further thickener, or for the modification of the demonstrated "thickener system" proposed by Iding.

The Examiner now recites that the addition of the Weibel references provides an appropriate motivation to further include a clay constituent to the Iding compositions. The applicant respectfully disagrees with such a determination.

The Weibel reference further includes further constituents which would dissuade the consideration of its applicability and its combined ability with the Iding reference. First, as is very clear from the Weibel reference, those compositions are thickened, bleach containing compositions. Immediately, a skilled artisan in the field of formulation chemistry would understand that the very reactive bleach species, here in the examples sodium hypochlorite is described, would be recognized as hampering the utility of a wide variety of other constituents, including thickening additives, to such a bleach containing system. Thus, it is quite fair to say that a skilled artisan considering formulations of the type according to the present invention would not look for any teaching or guidance to a bleach containing composition such as the Weibel reference.

Further, even if such a bleach containing reference were considered, a skilled artisan would understand that the selection of any constituents would be primarily dictated by the necessary coexistence with the bleach constituent in a liquid composition. An actual careful review of the Weibel document reveals that this is indeed true. Significantly, Weibel specifically teaches that his thickening systems necessarily require both (a) a cross-linked polyacrylate polymer and (b) "a synthetic smectite-type clay similar to hectorite instructor in composition a synthetic, rather than a natural, clay is preferably used in order to avoid degradation of the composition owing to small amounts of impurities which may be found in natural products." Thus, a skilled artisan would realize that Weibel's actual effect of teaching is rather circumscribed, and necessarily requires

US Serial No. 10/530372
Page 9 of 16

the presence of a synthetic clay as opposed to one which is mined or obtained from a natural source further in conjunction with a polyacrylate thickening in specific weight proportions. Additionally, it appears that the composition of the thickener is of course strongly influenced by the presence of the bleach containing constituent.

The applicant disagrees with the Examiner that the Weibel, bleach containing composition would be considered as a relevant reference in view of Iding for the reasons pointed out above. Additionally, the applicant points out that in their view, there is not motivation to enter any modification to the Iding reference which is already thickened to a satisfactory degree. If so, there is nothing in the Iding reference, which is a non-bleach containing composition, which would suggest that the synthetic clay according to Weibel would be compatible or desirable. Such appears to be an exercise in hindsight reconstruction and not a logical conclusion which is easily drawn from a side-by-side review of these two references. Additionally, the applicant points out that according to the presently claimed invention, as is supported by the specification as filed, the applicant's present thickening systems are not limited to synthetic smectite clays but rather, encompass broader classes of clays, and specifically include those which may be obtained from natural sources. Thus, the applicant disagrees that the Iding and the Weibel references can be readily combined or that it would be obvious to do so. Accordingly, reconsideration of the propriety of this grounds of rejection, and its withdrawal, is respectfully requested.

With respect to the Examiner's position that the combination of a polyacrylate thickener and a clay thickener is trivial and obvious, the applicant disagrees. The Examiner's attention is respectfully directed to a pertinent document, namely WO 95/08619 which at page 8, line 27 et. seq. notes that cross-linked polyacrylate polymers should be used to the exclusion of clay based thickener constituents, such as common clays, as such a combination would be ruinous to the thixotropic behavior of the inventions according to the WO 95/08619 document. This document is presented as a representative prior art document which clearly dissuades a skilled artisan from combining that cross-linked

US Serial No. 10/530372
Page 10 of 16

polyacrylate polymers and clay based thickeners. As an enclosure, a copy of the WO 95/08619 document is presented for convenient review by the Examiner.

Turning now to the Examiner's remarks concerning the fact that the claimed log reduction properties as recited by the presently amended claims would have been obvious in view of the combined Iding and Weibel references, the applicant strongly disagrees. With regard to the Iding reference, it is very clear therefrom that there is absolutely no recitation, nor suggestion that those compositions would exhibit any degree of antimicrobial efficacy. There is certainly no teaching or recitation within the Iding reference whereby those compositions would necessarily exhibit the degree of log reduction of the compositions against the microorganisms recited by claim 1 at the recited contact time. Iding is indeed wholly and notoriously silent as to any antimicrobial benefits. With regard to the Weibel reference, again, this document is also wholly silent as to any antimicrobial efficacy provided by his compositions. One of appropriate skill in the art, reviewing the Weibel reference, and even if they suspected an antimicrobial benefit would naturally attribute it to the bleach which is a well-known oxidizing agent and capable of destroying undesirable microorganisms. However, as is noted above, bleach is not a constituent which is recited, nor claimed in the presently claimed invention. Thus, the fact that the presently claimed invention according to the instant application provides such a useful antimicrobial benefit should be considered surprising over the Iding and Weibel references either considered separately, or jointly.

Accordingly, reconsideration of the outstanding ground of rejection in view of the Iding and Weibel reference is respectfully requested, and the rejection be withdrawn.

Regarding the rejection of claims 8, 9, 18 and 19 under 35 USC § 103(a) in view of US 4,758,377 to Iding in view of WO 96/35771 to Weibel further in view of US 4,414,128 to Goffinet (hereinafter, simply "Goffinet").

US Serial No. 10/530372
Page 11 of 16

The applicant respectfully traverses the grounds of rejection in view of the Iding, Weibel, and Goffinet rejection against the indicated claims.

For the sake of brevity, the applicant here repeats and incorporates by reference the remarks made above concerning the Iding and the Weibel references.

Turning now to the Goffinet references, the Examiner recites this liquid detergent composition which necessarily includes surfactants, mono or sesquiterpenes, and polar solvents such as ethylene glycols, cellasolves, etc. as supplementing the shortcomings of the Iding reference.

The applicant respectfully traverses the Examiner's rejection and line of reasoning.

With regard to Goffinet, again it is quite clear from a simple inspection thereof that the Goffinet compositions are laundry detergent compositions which include an appreciable amount of turpines or turpine derivatives which are generally derived as fractions of pine oil. These provide a very characteristic pine oil scent, as well as good grease cutting properties particularly for hydrophobic soils which may be absorbed into a textile or garment. However, while the Goffinet compositions may be useful for this limited purpose, it is very clear that these are only optionally thickened and the sole thickening constituents recited therein are the use of gums, and only xanthan gum is recited or disclosed in the application.

Again, it appears that the Examiner's rejection is based on a hindsight reconstruction of the presently claimed invention. A skilled artisan reviewing the Goffinet composition would likely dispose of it out of hand as it fails to demonstrate a composition which includes the presently claimed thickening system according to the instant invention. As such, such would immediately discount any technical relevancy of the Goffinet composition. Even if the Goffinet composition, although discounted as to its technical relevance were considered, it appears to be of no further relevance other than a standard

US Serial No. 10/530372
Page 12 of 16

chemical catalog which would be relied upon to recite a number of organic solvents. Indeed, this appears to be the sole purpose for the inclusion of the Goffinet composition in supplementing the Iding reference. However, even by including the sections of the Goffinet composition concerning the identity of organic solvents to the Iding composition, such does not overcome the inherent shortcomings of the Iding reference as is disclosed above. Again, Iding fails to provide any motivation for any modification of its thickener system, or to indicate the utility of any other class of thickeners in conjunction with its polyacrylate thickeners. Again, briefly the Weibel reference is wholly dependent upon a very specific class of synthetic clays, and further is based upon a bleach containing liquid composition. These would discourage any consideration of combinability or applicability to the Iding reference. The addition of the Goffinet composition does not overcome these inherent, and fatal flaws of the primary references to Iding and Goffinet. Accordingly, reconsideration of the propriety of the rejection in view of the combined Iding, Goffinet, and Weibel references as against the indicated claims is respectfully requested.

Regarding the rejection of claims 1 - 7, 10 - 17, and 20 under 35 USC § 102(b) or in the alternative under 35 USC § 103(a) in view of US 4,767,563 to De Buzzaccarini (hereinafter simply "De Buzzaccarini").

The applicant respectfully traverses the rejection of the indicated claims in view of the De Buzzaccarini reference.

With regard to the De Buzzaccarini reference, this document is essentially directed towards a liquid scouring cleanser which includes as necessary constituents: at least 0.1%, preferably 0.5 - 10% by weight of a terpene or terpene derivative, at least 0.1% preferably 0.5 - 10% of benzyl alcohol, 1 - 50%, preferably 15 - 30%, more preferably 20 - 25% of specific water-insoluble abrasives and optionally can include other conventional additives including surfactants, hydro tropes, builders, water softeners, carrier liquids such as water, perfumes, thickeners, and the like. With regard to what is actually demonstrated by De Buzzaccarini, reference is made to examples I through XV.

US Serial No. 10/530372
Page 13 of 18

Therein are disclosed various compositions which, in examples III through XV, do include a thickener. However, it is quite pertinent to point out that the sole thickeners which are used in these examples are either natural gums, or are polyacrylic acids. Quite pertinently, no combinations of dissimilar classes of thickeners are demonstrated. Even more pertinently, there is no demonstration of the use of any clay-based thickening constituent in any of the examples.

Thus, the applicant respectfully traverses the Examiner's recitation that the De Buzzaccarini document anticipates, or renders the presently claimed application obvious.

With regard to the identity of thickeners, in applicant's presently claimed independent claim, there is required at least one clay thickener with at least one further thickener selected from the group consisting of polysaccharides, polycarboxylates, and polyacrylamides. De Buzzaccarini fails to demonstrate combinations of any dissimilar thickener constituents. Further, with regard to De Buzzaccarini at column 4, line 45 - 53, there is no mention that combinations of his recited class of thickeners are contemplated. Thus, it is not believed that the De Buzzaccarini document can be fairly said to anticipate the presently claimed invention. Alternatively, it is quite apparent that the De Buzzaccarini reference is wholly silent as to providing any antimicrobial properties attendant upon the use of this compositions. Again, applicant's claim 1 claims specific degrees of antimicrobial efficacy which, are not indicated in any way or form within the four corners of the De Buzzaccarini reference.

Turning now to the rejection based on obviousness of the present claims in view of the De Buzzaccarini reference, the applicant again disagrees with the Examiner's contentions. As noted above, De Buzzaccarini fails to describe a thickener system which comprises a claim combination with a further thickener. This appears to be supported by the fact that De Buzzaccarini, although describing various systems fails to disclose the use of clay either singly, or in combination with any other thickener. For that matter, as has been discussed above, in examples III - XV no combinations of any dissimilar

US Serial No. 10/530372
Page 14 of 16

classes of thickeners are disclosed. Rather, it is fair to say that in viewing the De Buzzaccarini reference, as is specifically disclosed therein, De Buzzaccarini fails to teach any combination of thickeners and this is supplemented by failing to demonstrate any combination of thickeners. It is contended that a skilled artisan would not overlook this very salient point. A skilled artisan, considering the De Buzzaccarini reference then could very appropriately understand that combinations of thickeners would not be advantageous according to the De Buzzaccarini document. Further, as clays are nowhere recited except in the brief mention in column 4, the De Buzzaccarini document would fail to provide any useful teaching as to effective amounts of clays, or the types of clays, or any differentiation between synthetic clays such as the type taught by Weibel, or the use of naturally occurring, or mined clays such as might be used according to the present invention.

Accordingly, reconsideration of the propriety of the De Buzzaccarini document as against the indicated claims, and its withdrawal from further consideration is respectfully requested.

Regarding the rejection of claims 8, 9, 18 and 19 in view of 35 USC § 103(a) in view of De Buzzaccarini further in view of US 4,414,128 to Goffinet.

The applicant respectfully traverses the rejection of the indicated claims in view of the combined references to De Buzzaccarini and Goffinet..

For the sake of brevity, the applicant herein incorporates by reference the prior remarks concerning the De Buzzaccarini and the Goffinet references.

Again, it appears that the Examiner's reliance upon the Goffinet reference is to introduce the identity of certain organic solvents to the De Buzzaccarini document.

Again, the applicant points out that such appears to be of little relevance to the presently claimed invention, as the De Buzzaccarini reference, further in consideration of the

US Serial No. 10/530372
Page 15 of 16

Goffinet reference, still fails to teach or suggest the specific thickening system, and also fails to teach or suggest a thickened composition having the degree of antimicrobial efficacy against the specific microorganisms as is presently claimed. It is the applicant's view that the combination of the Goffinet reference does not overcome the inherent shortcomings of the De Buzzaccarini reference pointed out above. More specifically, the addition of certain organic solvents as more specifically recited by Goffinet does not overcome the fact that the De Buzzaccarini reference fails to teach the specific thickening systems, and the provision of specific antimicrobially effective compositions such as is only taught by the presently claimed invention.

Accordingly, reconsideration of the propriety of the rejection in view of the combined De Buzzaccarini and Goffinet references is respectfully requested.

In view of the foregoing, allowance of the presently presented claims, and early issuance of a Notice of Allowability is respectfully requested.

Should the Examiner feel that telephonic discussion with the applicant's attorney would meaningfully advance the prosecution of this application towards allowability, the Examiner is invited to contact the undersigned at their early convenience.

Conditional Authorization for Fees


Should any further fee be required by the Commissioner in order to permit the timely entry of this paper, including but not limited to any fees for additional claims and any fees for any petition for an extension of time, the Commissioner is authorized to charge any such fee to Deposit Account No. 14-1263.

US Serial No. 10/530372
Page 16 of 16

RECEIVED
CENTRAL FAX CENTER

OCT 20 2006

Respectfully Submitted;



Andrew N. Parfomak, Esq.
Reg.No. 32,431
Norris, McLaughlin & Marcus, PC
875 Third Avenue, 18th Floor
New York, NY 10022


20 October 2006

Date:

Tel: 212 808-0700

Certification of Telefax Transmission:

I hereby certify that this paper is being telefax transmitted to the US Patent and Trademark Office
to telefax number: 571-273-8300 on the date shown below:



Kimberly Brittingham

10/20/06

Date


Enclosure – copy of WO 95/08619

C:\ANPCMB\102792\432\Amendment02.doc

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5: C11D 3/16	A1	(11) International Publication Number: WO 95/08619 (43) International Publication Date: 30 March 1995 (30.03.95)
(21) International Application Number: PCT/US94/08190 (22) International Filing Date: 20 July 1994 (20.07.94) (30) Priority Data: 08/125,949 23 September 1993 (23.09.93) US (71) Applicant: THE CLOROX COMPANY [US/US]; P.O. Box 24305, Oakland, CA 94623-1305 (US). (72) Inventors: CHOY, Clement, K.; 1365 Sugarloaf Drive, Alamo, CA 94507 (US). ARGO, Brian, P.; 1750 Edna Court, Tracy, CA 95376 (US). BRODBECK, Kevin, J.; 815 Bonde Court, Pleasanton, CA 94566 (US). HEARN, Lynn, M.; 4251 Cornell Way, Livermore, CA 94550 (US). (74) Agents: MAZZA, Michael, J. et al.; The Clorox Company, P.O. Box 24305, Oakland, CA 94623-1305 (US).	(81) Designated States: CA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report	

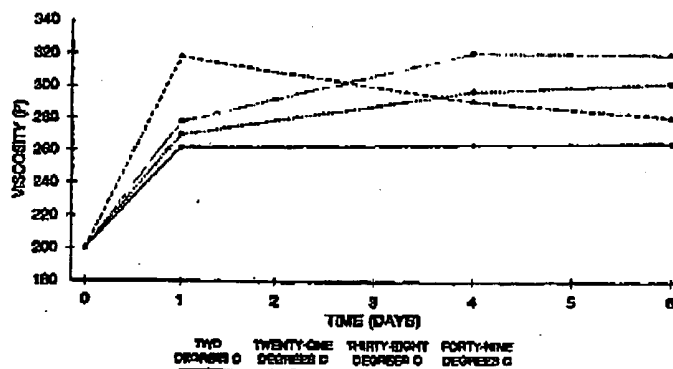(54) Title: **THICKENED AQUEOUS ABRASIVE CLEANSER WITH IMPROVED RINSABILITY**

(57) Abstract

The invention is a hard surface abrasive scouring cleanser having no significant syneresis, undue viscosity or yield stress increase, stably suspends abrasives, and has excellent rinsing characteristics. Furthermore, the present invention provides a stably suspended abrasive scouring cleanser which uses relatively small amounts of surfactants, thus lowering the total cost of producing these cleansers. The lesser amount of surfactant also affords the cleanser a milder feel and lower unsaturated surfactant odor, while also requiring lower levels of fragrance. The absence of solvents results in a less irritating product as well. In one aspect the invention comprises, in aqueous solution: (a) a cross-linked polyacrylate; (b) at least one nonionic surfactant; (c) a pH adjusting agent; and (d) a calcium carbonate abrasive. In a further aspect the invention comprises, in aqueous solution: (a) a cross-linked polyacrylate thickener; (b) a mixed surfactant system which comprises one anionic surfactant and an amine oxide nonionic surfactant; (c) a pH adjusting agent; (d) a hydrotrope; and (e) a particulate abrasive.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

WO 95/08619

PCT/US94/08190

THICKENED AQUEOUS ABRASIVE CLEANSER WITH IMPROVED RINSABILITY

1. Field of the Invention

This invention relates to a thickened aqueous abrasive scouring cleanser and, in particular, to a thickened aqueous abrasive cleanser having improved phase and viscosity stability and enhanced rinsability.

2 Description of Related Art

In the quest for hard surface cleaners which have efficacy against a variety of soils and stains, various heavy duty liquid cleansers have been developed. As an example, U.S. Patents 3,985,668, 4,005,027 and 4,051,056 all issued to *Hartman*, show a combination of perlite (an expanded silica abrasive), a colloid-forming clay, in combination with a hypochlorite bleach, a surfactant and a buffer in which abrasives are suspended. A clay thickened system of this type tends to set up or harden upon storage due to the false body nature of the thickeners, and requires shaking before use to break down the false body structure. Other prior art cleaners which attempt to suspend abrasives use either inorganic colloid thickeners only, or high levels of mixed surfactant thickeners. Syneresis often becomes a problem as the solids portion of such cleansers substantially separate from the liquids portion. Further, surfactants are costly and may have a detrimental effect on hypochlorite stability.

U.S. Patent 4,287,079, issued to *Robinson*, relates to a clay/silicon dioxide thickened, bleach-containing abrasive cleanser which could contain an anionic surfactant. *Chapman*, US 4,240,919 describes a liquid abrasive scouring cleanser with a

WO 95/08619

PCT/US94/08190

thixotropic rheology and discloses a multivalent stearate soap to provide the thixotropic rheology. Such stearate thickened systems exhibit poor phase stability at temperatures above about 90° F. Gel-like liquid automatic dishwasher detergents are disclosed in *Baxter*, US 4,950,416; *Drapier et al.*, US 4,732,409; and EP 345,611 to *Delvaux et al.* (published 12/13/89). The compositions of *Drapier et al.* and *Delvaux et al.* are clay thickened, phosphate-built thixotropic detergents. The phosphate builder system disclosed by these references is incompatible with a calcium carbonate abrasive. *Baxter* also discloses C₈₋₂₂ fatty acids or their aluminum, zinc or magnesium salts to increase yield stress and cup retention properties of an automatic dishwashing detergent which is thickened with a colloidal alumina. Like *Drapier et al.* and *Delvaux et al.*, however, the compositions of *Baxter* are phosphate based, and do not include an abrasive. While employing colloidal alumina as a thickener, *Baxter* uses only small amounts of surfactants for their cleaning functionality, thus results in a thixotropic rheology, as compared with the plastic rheology of the formulations herein.

A number of references teach thickening automatic dishwashing compositions with polyacrylates. *Finley et al.*, EP 373,864, and *Prince et al.*, U.S. 5,130,043, disclose automatic compositions consisting of polyacrylate thickeners, amine oxide detergent and optional fatty acid soap and/or anionic surfactant. *Corring*, U.S. 4,836,948, employs polyacrylates in combination with colloidal thickeners and high levels of builders. *Ahmed*, U.S. 5,185,096, also describes a thickened composition employing fatty acids and salts plus a stearate stabilizer and optionally a clay or polyacrylate thickener.

The disclosures of U.S. Patents 4,599,186, 4,657,692 and 4,695,394, all to *Choy et al.*, teach the use of an inorganic colloid combined with a surfactant/electrolyte system to provide good physical stability. These patents are commonly owned herewith and are incorporated herein by reference.

In view of the art, there remains a need for improving long-term phase and viscosity stability in thickened liquid abrasive cleansers. Additionally, many of the cleansers

WO 95/08619

PCT/US94/08190

of the art exhibit poor rinsability, requiring numerous rinse/sponge cycles to remove the cleanser. There is thus an additional need to significantly improve the rinsability of the cleanser.

5

SUMMARY OF THE INVENTION

In one aspect of the invention, there is disclosed a thickened liquid abrasive cleanser with enhanced long-term phase and viscosity stability and improved rinsability comprising, in aqueous solution:

- 10 (a) a cross-linked polyacrylate;
(b) at least one nonionic surfactant;
(c) a pH adjusting agent; and
(d) a calcium carbonate abrasive.

- 15 The hard surface abrasive scouring cleansers of the invention provide excellent phase and viscosity stability while suspending abrasive. Additionally, the cleansers of the invention also show substantially no syneresis, even over time and at elevated temperatures, nor do they exhibit a significant change in yield value. Because of the resulting physical stability, the cleansers do not require shaking before use to
20 resuspend solids into a flowable form. The use of the polyacrylate/nonionic surfactant thickener also affords the cleanser improved rinsability.

A further embodiment of the invention provides an aqueous hard surface cleanser without substantial syneresis comprising, in aqueous solution:

- 25 (a) a cross-linked polyacrylate;
(b) a mixed surfactant system which comprises at least one anionic surfactant and one nonionic surfactant;
(c) a pH adjusting agent; and
(d) a particulate abrasive.

30

WO 95/08619

PCT/US94/08190

Optionally, oxidants, additional cleaning-effective surfactants, hydrotropes, soaps, fragrances, additional abrasives and solvents may be added to the foregoing embodiments of the cleanser of the present invention.

5

It is therefore an object of this invention to provide a stable aqueous hard surface abrasive cleanser which has the ability to stably suspend abrasive particles.

10

It is a further object of this invention to provide a hard surface abrasive cleanser which has substantially no syneresis, and which is stable over time and at elevated temperatures.

15

It is a further object of the present invention to provide a hard surface abrasive, cleanser which does not increase in viscosity over time, while retaining its desired low yield stress to ensure ease of dispensing.

20

It is yet another object of this invention to provide an aqueous hard surface abrasive cleanser which does not require shaking before use to facilitate pouring/dispensing.

25

It is still another object of this invention to provide an aqueous hard surface abrasive cleanser which does not set up or harden over time and therefore remains easily flowable.

30

It is a further object of this invention to provide an aqueous scouring abrasive cleanser which has demonstrated cleaning efficacy on soap scums, oily soils, and oxidizable, e.g. organic, stains.

It is a further object of the present invention to provide a hard surface cleanser which exhibits improved rinsability.

It is yet another object of the present invention to provide a thickened product with lower surfactant levels, resulting in a milder feel and less unaesthetic surfactant odor.

WO 95/08619

PCT/US94/08190

In The Drawings

Fig. 1 is a graph showing viscosity stability of a formulation of the present invention during six days' storage at 2, 21, 38 and 49° C.

5

DETAILED DESCRIPTION OF THE INVENTION

The invention provides a hard surface abrasive scouring cleanser having no significant syneresis, undue viscosity or yield stress value increase, stably suspends abrasives, and
10 has excellent rinsing characteristics. All of the foregoing advantages are present over time and after these compositions have been subjected to storage at elevated temperatures.

Furthermore, as compared to prior art cleaners which include high levels of mixed
15 surfactants, the present invention provides a stably suspended abrasive scouring cleanser which uses relatively small amounts of surfactants, thus lowering the total cost of producing these cleansers. The lesser amount of surfactant also affords the cleanser a milder feel and lower unaesthetic surfactant odor, while also requiring lower levels of fragrance. The absence of solvents results in a less irritating product
20 as well.

In one embodiment, the invention provides a hard surface abrasive scouring cleanser comprising, in aqueous solution:

- (a) a cross-linked polyacrylate;
- 25 (b) at least one nonionic surfactant;
- (c) a pH adjusting agent; and
- (d) a calcium carbonate abrasive.

A further embodiment of the invention provides an aqueous hard surface cleanser
30 without substantial syneresis comprising, in aqueous solution:

- (a) a cross-linked polyacrylate;

WO 95/08619

PCT/US94/08190

- (b) a mixed surfactant system which comprises at least one anionic surfactant and at least one nonionic surfactant;
- (c) a pH adjusting agent; and
- (d) a particulate abrasive.

5

The individual constituents of the inventive cleansers are described more particularly below. As used herein, all percentages are weight percentages of actives, unless otherwise specified. Additionally, the term "effective amount" means an amount sufficient to accomplish the intended purpose, e.g., thickening, suspending, cleaning, etc.

10

Polyacrylate

The cross-linked polyacrylate polymers of the present invention are generally characterized as resins in the form of acrylic acid polymers. These resins are well known for use in a number of applications and it is commonly theorized that the carboxyl groups in the polymers are responsible for desirable characteristics resulting from the polymers.

15

Such cross-linked polyacrylate polymers are available from a number of sources including materials available under the trade name CARBOPOL® from B. F. Goodrich Company and under the trade name POLYGEL® available from 3V Chemical Company. Cross-linked polyacrylate polymers of a type contemplated by the present invention are also believed to be available from other sources which are also contemplated for use within the present invention and as defined herein.

20

The cross-linked polyacrylate polymers are generally characterized as acrylic acid polymers which are non-linear and water-dispersible while being cross-linked with an additional monomer or monomers in order to exhibit a molecular weight in the range from eighty thousand to about seven million g/mole, preferably about one hundred thousand to about seven million g/mole, more preferably about one million to seven million g/mole. Additionally, an average formula weight for a polymer subunit is about 60-120 g/mole, preferably 75-95 g/mole. The most preferred CARBOPOLs

25

30

WO 95/08619

PCT/US94/08190

- average about 86 g/mole. Preferably, the polymers are cross-linked with a polyalkenyl polyether, the cross-linking agents tending to interconnect linear strands of the polymers to form the resulting cross-linked product. The pH of an aqueous polymer solution provides a rough measure of the number of carboxyl groups in the polymer, and thus is an estimate of the degree of cross-linking and/or degree of branching of the polymer. Preferably, the pH of a 2% polymer solution at 21° C should be between 1.8 and 5.0, more preferably 2.0 and 3.0. The pH is measured before neutralization.
- Generally all cross-linked polyacrylate polymers are effective for achieving, in conjunction with the nonionic surfactant, the desired viscosity and stability in compositions of the type contemplated by the present invention. However, some differences particularly in terms of stability have been observed for different cross-linked polyacrylate polymers. Suitable cross-linked polyacrylate polymers for purposes of the present invention include the CARBOPOL 600 series, 900 series, 1300 series and 1600 series resins. Most preferred are the CARBOPOL 1621 and 1610 resins (formerly known as 613 and 623 resins, respectively), which include a cross-linking agent plus hydrophobe. Also suitable is CARBOPOL 672 (formerly 614). More specific examples of polymers selected from these series are included in the examples set forth in the Experimental Section below. Similarly, effective cross-linked polyacrylate polymers for purposes of the present invention also include those available under the trade name POLYGEL and specified as DA, DB, and DK, available from 3V Chemical Company, and the SOKOLAN® polymers produced by the BASF Corporation.
- As is also illustrated by the examples in the following Experimental Section, certain of the cross-linked polyacrylate polymers noted above may provide particular advantages or features within a thickened composition as contemplated by the present invention. Accordingly, it is also contemplated by the present invention to particularly employ mixtures or combinations of such polymers in order to produce compositions exhibiting combined characteristics of the respective polymers.

WO 95/08619

PCT/US94/08190

Generally, the cross-linked polyacrylate polymers of the present invention are believed to be tightly coiled in a presolvated condition with relatively limited thickening capabilities. Upon being dispersed in water, the polymer molecules are hydrated and uncoil or relax to varying degrees. Thickening is particularly effective with the polyacrylate polymers when they are uncoiled or relaxed as noted above. Uncoiling of the polyacrylate polymers may be achieved for example by neutralizing or stabilizing the polymer with inorganic bases such as sodium hydroxide, potassium hydroxide, ammonium hydroxide or low molecular weight amines and alkanolamines. Neutralization or stabilization of the polyacrylate polymers in this manner rapidly results in almost instantaneous thickening of an aqueous solution containing the polymers and nonionic surfactants. It is noted that the highest viscosity occurs when the polymer is completely neutralized; however, it has been empirically determined that elasticity is greater when the polymer is only partially neutralized. For some applications, it may be preferable to enhance elasticity rather than viscosity, for example, to aid in dispensing through restricted orifices, or to improve residence time on non-horizontal surfaces. Elasticity is also important to suspend abrasives, although even when fully neutralized the polymer retains sufficient elasticity for this purpose.

As noted above, the particular effectiveness of the cross-linked polyacrylate polymers in the present invention is believed to be due to a characteristic yield point or yield value. In this regard, it is noted that a typical liquid tends to deform as long as it is subjected to a tensile or shear stress of the type created by dispensing the liquid from a spray-type dispenser or the like. For such a liquid under shear, the rate of deformation or shear rate is generally proportional to the shear stress. This relationship was originally set forth in Newton's Law and a liquid exhibiting such proportional or straight-line characteristics are commonly termed Newtonian liquids.

With respect to thickening, it should be noted that while there are many types of inorganic and organic thickeners, not all will provide the proper type of shear-thinning rheology desired in the invention. Common clays, for instance, will likely lead to a false body rheology, which, at rest, turn very viscous. A thixotropic rheology is also not desirable in this invention since in the thixotropic state, a liquid at rest


WO 95/08619

PCT/US94/08190

also thickens dramatically. If the thixotrope has a yield stress value, as typically found in clay-thickened liquid media, the fluid at rest may not re-achieve flowability without shaking or agitation. The nonionic surfactants included in the formulas of this invention are important in achieving the shear-thinning rheology. The polyacrylate/
5 nonionic surfactant combination can develop viscosities in the range of 20-70,000 centipoise (cP), preferably 1,000-40,000 cP, and most preferably 10,000-30,000 cP.

Surfactants

The most preferred nonionic surfactants are the amine oxides, especially trialkyl
10 amine oxides, as representative below.



In the structure above, R^1 and R^2 can be alkyl of 1 to 3 carbon atoms, and are most preferably methyl, and R is alkyl of about 10 to 20 carbon atoms. When R^1 and R^2 are both methyl and R is alkyl averaging about 12 carbon atoms, the structure for dimethyldodecylamine oxide, a preferred amine oxide, is obtained. Other preferred
15 amine oxides include the C_{14} alkyl (tetradecyl) and C_{16} (hexadecyl) amine oxides. It is particularly preferred to use mixtures of any of the foregoing, especially a mixture of C_{12} and C_{16} dimethyl amine oxide. In general, it has been found that the longer alkyl group results in improved viscosity development and better stability, while the shorter alkyl group appears to contribute to better cleaning performance.
20 Representative examples of these particular type of bleach-stable nonionic surfactants include the dimethyldodecylamine oxides sold under the trademarks AMMONYX® LO and CO by Stepan Chemical. Yet other preferred amine oxides are those sold under the trademark BARLOX® by Lonza, Conco XA sold by Continental Chemical Company, AROMAX™ sold by Akzo, and SCHERCAMOX™ sold by Scher Brothers,
25 Inc. These amine oxides preferably have main alkyl chain groups averaging about 10 to 20 carbon atoms.

WO 95/08619

PCT/US94/08190

Other suitable nonionic surfactants are, for example, polyethoxylated alcohols, ethoxylated alkyl phenols, anhydrosorbitol, and alkoxylated anhydrosorbitol esters. An example of a preferred nonionic surfactant is a polyethoxylated alcohol manufactured and marketed by the Shell Chemical Company under the trademark

5 NEODOL®. Examples of preferred Neodols are Neodol 25-7 which is a mixture of 12 to 15 carbon chain length alcohols with about 7 ethylene oxide groups per molecule; Neodol 23-65, a C₁₂₋₁₃ mixture with about 6.5 moles of ethylene oxide; Neodol 25-9, a C₁₂₋₁₃ mixture with about 9 moles of ethylene oxide; and Neodol 45-7, a C₁₄₋₁₅ mixture with about seven moles of ethylene oxide. Other nonionic surfactants

10 useful in the present invention include a trimethyl nonyl polyethylene glycol ether, manufactured and marketed by Union Carbide Corporation under the Trademark TERGITOL® TMN-6, and an octyl phenoxy polyethoxy ethanol sold by Rohm and Haas under the Trademark TRITON™ X-114. Polyoxyethelene alcohols, such as BRIJ™ 76 and BRIJ 97, trademarked products of Atlas Chemical Co., are also useful.

15 BRIJ 76 is a stearyl alcohol with 10 moles of ethylene oxide per molecule and BRIJ 97 is an oleyl alcohol with 10 moles of ethylene oxide per molecule. Betaines and their derivatives, especially C₁₀₋₂₀ betaines, are also useful. Particularly preferred are betaines such as those described in the previously mentioned *Choy et al.* references, the disclosures of which are incorporated herein by reference.

20

The polyacrylates of the present invention are highly branched and, as described previously, are relatively tightly coiled in a presolvated condition. When dispersed in water, the polymer molecules are hydrated and uncoil to some degree, providing some thickening. However, full viscosity development occurs only when the polymer

25 is neutralized, creating a net negative charge on the carboxyl group. Owing to the proximity of the carboxyl groups, the negatives tend to repel each other, thus greatly increasing the volume occupied by the polymer and resulting in significant thickening. In any system where cations may be present, however, these cations may mitigate the electrostatic repulsion between adjacent anionic carboxyl groups or, in the case of

30 divalent cations, may actually bridge the carboxyl groups, thus recoiling the polymer. Calcium is one such divalent cation which can create such a problem. The use of such cross-linked polyacrylate thickeners in the art has therefore been limited to

WO 95/08619

PCT/US94/08190

- compositions wherein high levels of calcium, for example calcium carbonate, were not present. It has now been surprisingly found that a polyacrylate can be used as a thickener even in a system containing high levels of a calcium carbonate abrasive by employing the identified nonionic surfactants. It is theorized that the nonionic surfactant affords viscosity stability to the polyacrylate by "surfactant shielding," that is, the positive pole of the nonionic surfactant is attracted to the negatively charged carboxyl groups of the polymer, thus shielding the carboxyl groups from small cationic molecules which would reduce the volume of the polyacrylate. It has been empirically determined that shielding-effective nonionic surfactants have a hydrophobic - lipophobic balance (HLB) of between about 11-13. Most preferred is either an amine oxide, an ethoxylated alcohol, or a mixture of the two. The nonionic surfactant is present in a shielding-effective amount, generally about 0.1 to 10% by weight, more preferably about 0.5 to 3% by weight.
- Table 1 shows the effect of an amine oxide and an ethoxylated alcohol surfactant on viscosity stability of a formulation comprising 0.4% CARBOPOL 613, 0.6% sodium hydroxide, 30% calcium carbonate, and 0.9% surfactant. The formulations were stored at 49° C, and viscosity was measured periodically.

WO 95/08619

PCT/US94/08190

TABLE 1
Effect of Nonionic
Surfactants on Viscosity

Time (Days)	VISCOSITY ⁽¹⁾ (P)		
	Comparative Example ⁽²⁾	Amine Oxide	Ethoxylated Alcohol
0	400	293	348
5	ppt ⁽³⁾	398	349
12	"	375	349
20	"	398	NA
24	"	NA	370
34	"	450	345
43	"	410	NA
56	"	400	364

(1) Viscosity, in Poise, was measured using a Brookfield RVT rheometer at 21° C, spindle No. 5 at 5 rpm.

(2) Contained water, 40% calcium carbonate, 0.4% CARBOPOL 613, and pH adjusting agent to pH 10.

(3) Polymer precipitated.

It can be seen that the control, lacking a nonionic surfactant, was very unstable and the polymer precipitated after only five days, while both formulations of the present invention (including nonionic surfactant) exhibited excellent viscosity development and stability over time and at an elevated temperature.

Cosurfactants

A cosurfactant may be selected from anionic surfactants such as alkali metal alkyl sulfates, alkyl aryl sulfonates, primary and secondary alkane sulfonates (SAS, also referred to as paraffin sulfonates), alkyl diphenyl ether disulfonates, and mixtures thereof. These anionic surfactants will preferably have alkyl groups averaging about 8 to 20 carbon atoms. Most preferred are alkali metal salts of alkyl aryl sulfonic acids, and especially preferred are linear alkyl benzene sulfonates, known as LAS's.

WO 95/08619

PCT/US94/08190

Most preferred are LAS's having C₈₋₁₆ alkyl groups, examples of which include Stepan Chemical Company's BIOSOFT®, and CALSOFT® manufactured by Pilot Chemical Company. Other suitable, though less preferred, anionic cosurfactants include alkali metal alkyl sulfates such as Conco Sulfate WR, sold by Continental Chemical Company, which has an alkyl group of about 16 carbon atoms; and secondary alkane sulfonates such as HOSTAPUR SAS, manufactured by Farbwerke Hoechst A.G., Frankfurt, Germany. Table 2 below is a comparison of various surfactant combinations.

TABLE 2

Surfactant Effects on Initial Viscosity and Stability
of Polymer Based Abrasive Cleansers

	FORMULA					
	A	B	C	D	E	F
Amine Oxide (3:1 LO/CO) wt. %	0.9	0.9	0.9	0.45	0.0	0.0
Tergitol TMN-6 (Ethoxylate) wt. %	0.0	0.0	0.0	0.45	0.9	0.9
SAS wt. %	1.7	1.7	0.0	0.0	0.0	1.7
Sodium Laurate	0.8	0.0	0.0	0.0	0.0	0.0
Initial Viscosity ⁽¹⁾	207	132	400	400	420	150
Physical Stability	Good	Poor ⁽²⁾	Good	Good	Good	Poor ⁽²⁾

(1) Viscosity, in Poise, was measured using a Brookfield RVT rheometer at 21° C, spindle No. 5 at 5 rpm.

(2) Polymer precipitated.

In addition to the components listed, the formulations of Table 2 also included 0.4% CARBOPOL 613, 30% calcium carbonate abrasive, and 0.4% NaOH. It can be seen from Table 2 that a nonionic surfactant (either amine oxide or ethoxylated alcohol) alone yields good viscosity development and results in a stable product. When a secondary alkane sulfonate is included, viscosity development and stability are adversely affected unless a soap is also included.

WO 95/08619

PCT/U894/08190

Determining an appropriate mixture of polyacrylate and nonionic surfactants is very important to the invention. While theoretically anywhere from about 0.01% to 5% polyacrylate can be used, and about 0.1 to 15% surfactants (anionic, nonionic or mixtures thereof), so long as proper rheology and lack of phase separation or syneresis result, in practice it is preferred to use minimal quantities of polyacrylate and surfactants. The amount that is ordinarily used is an amount which is both abrasive-suspending and thickening-effective amount. Applicants have found that preferably about 0.1% to 3%, and most preferably about 0.1% to 1% of polyacrylate, and preferably about 0.25% to 5.0%, most preferably about 0.5% to 3.0% of total surfactant are used in the cleansers of this invention. These ranges appear to result in compositions having the desired syneresis values, ability to suspend abrasives, enhanced rinsability and, because of the reduced amount of actives in the compositions, lower overall manufacturing costs.

15

pH Adjusting Agent

pH adjusting agents may be added to adjust the pH, and/or buffers may act to maintain pH. In this instance, alkaline pH is favored for purposes of both rheology and cleaning effectiveness. Additionally, if the cleanser includes a hypochlorite source, a high pH is important for maintaining hypochlorite stability. Examples of buffers include the alkali metal silicates, metasilicates, polysilicates, carbonates, hydroxides, mono-ethanolamine (MEA) and mixtures of the same. Control of pH may be necessary to maintain the stability of a halogen source and to avoid protonating the amine oxide. For the latter purpose, the pH should be maintained above the pKa of the amine oxide. Thus for the hexadecyl dimethyl amine oxide, the pH should be above about 6. Where the active halogen source is sodium hypochlorite, the pH is maintained above about pH 10.5, preferably above or about pH 12. Most preferred for this purpose are the alkali metal hydroxides, especially sodium hydroxide. The total amount of pH adjusting agent/buffer including that inherently present with bleach plus any added, can vary from about 0.1% to 5%, preferably from about 0.1-1.0%.

WO 95/08619

PCT/US94/08190

Stabilizing Agent

A stabilizing agent may be necessary to maintain viscosity and/or phase stability when certain anionic cosurfactants are present. Preferred stabilizing agents are
5 hydrotropes, which are generally described as non-micelle-forming substances, either liquid or solids, organic or inorganic, capable of solubilizing insoluble compounds in a liquid medium. As with surfactants, it appears that hydrotropes must interact or associate with both hydrophobic and hydrophilic media. Unlike surfactants, typical hydrotropes do not appear to readily form micelles in aqueous media on their own.
10 In the present invention, it is important that the hydrotrope act as a dispersant and not as a surfactant. Generally, for a formulation of the present invention, a hydrotrope begins to act as a surfactant when the formulation exhibits a drop in phase stability. As a dispersant, the hydrotrope acts to prevent micelle formation by any anionic surfactants present. Similarly, it should be noted that concentration or
15 amount of the material, as well as type, may also be critical towards determining whether such material is a hydrotrope. Thus, materials which ordinarily are classified surfactants may in fact behave as hydrotropes if the amount used is limited.

The preferred hydrotropes are alkali metal salts of benzoic acid and its derivatives;
20 alkyl sulfates and sulfonates with 6-10 carbons in the alkyl chain, C_{8-14} dicarboxylic acids, anionic polymers such as polyacrylic acid and their derivatives; and most preferably, unsubstituted and substituted, especially the alkali metal salts of, aryl sulfonates; and unsubstituted and substituted aryl carboxylates. As used herein, aryl includes benzene, naphthalene, xylene, cumene and similar aromatic nuclei. Further,
25 "substituted" aryl means that one or more substituents known to those skilled in the art, e.g., halo (chloro, bromo, iodo, fluoro), nitro, or C_{1-4} alkyl or alkoxy, can be present on the aromatic ring. Other good dispersants include other derivatives of aryl sulfonates, salts of phthalic acid and its derivatives and certain phosphate esters. Most preferred are alkyl naphthalene sulfonates (such as Petro 22 available from
30 Petro Chemicals Company) and sodium xylene sulfonate (such as Stepanate X, available from Stepan Chemical Company. Also preferred as stabilizing agents are soaps, especially soluble alkali metal soaps of a fatty acid, such as C_{6-14} fatty acid

WO 95/08619

PCT/US94/08190

soaps. Especially preferred are sodium and potassium soaps of lauric and myristic acid. The soap is the preferred stabilizing agent when a secondary alkane sulfonate cosurfactant is employed. When present, sufficient stabilizing agent is added to stabilize, generally 0 to no more than 1% by weight, preferably about 0.1 to 0.5 weight percent. With certain cosurfactant and/or adjunct combinations, it may be preferred to include a mixture of soap and hydrotrope as the stabilizing agent.

Abrasives

Abrasives are used in the invention to promote cleaning action by providing a scouring action when the cleansers of the invention are used on hard surfaces. Abrasives can be present in amounts ranging from about 1% to 70% by weight of the compositions of this invention, preferably about 20-50% by weight. Particle size will range from average particle size of about ten to eight hundred, more preferably forty to six hundred, most preferably fifty to five hundred microns. In general, about 50% or more of the particles will have particle diameters of greater than one hundred microns (pass through U.S. 150 mesh sieves). Particle hardness of the abrasives can range from Mohs hardness of about 2-8, more preferably 3-6. Especially preferred is calcium carbonate, also known as calcite. Calcite is available from numerous commercial sources such as Georgia Marble Company, and has a Mohs hardness of about 3. Typically, a size of U.S. 140 mesh is selected, although others may be appropriate. It is important that the abrasive have the specified small particle size to ensure that little or no thickening occurs with the abrasives. Insoluble inorganic particulate materials can thicken, but such thickening results in a rheology which is not preferable, and thus is to be avoided. Abrasives such as a perlite, silica sand and various other insoluble, inorganic particulate abrasives can also be used, such as quartz, pumice, feldspar, tripoli and calcium phosphate.

Optional Ingredients

The composition of the present invention can be formulated to include such components as fragrances, coloring agents, whiteners, solvents, chelating agents and

WO 95/08619

PCT/US95/08190

builders, which enhance performance, stability or aesthetic appeal of the composition. From about .01% to about .5% of a fragrance such as those commercially available from International Flavors and Fragrance, Inc. may be included in any of the compositions of the first, second or third embodiments. Dyes and pigments may be included in small amounts. Ultramarine Blue (UMB) and copper phthalocyanines are examples of widely used pigments which may be incorporated in the composition of the present invention. Buffer materials, e.g. carbonates, silicates and polyacrylates also may be added. Oxidants, e.g. bleaches, are preferred for their cleaning activity, and may be selected from various halogen or peroxygen bleaches. Particularly preferred is a halogen bleach source which may be selected from various hypochlorite-producing species, for example, bleaches selected from the group consisting of the alkali metal and alkaline earth salts of hypohalite, haloamines, haloimines, haloimides and haloamides. All of these are believed to produce hypohalous bleaching species *in situ*. Hypochlorite and compounds producing hypochlorite in aqueous solution are preferred, although hypobromite is also suitable. Representative hypochlorite-producing compounds include sodium, potassium, lithium and calcium hypochlorite, chlorinated trisodium phosphate dodecahydrate, potassium and sodium dichloroisocyanurate and trichlorocyanuric acid. Organic bleach sources suitable for use include heterocyclic N-bromo and N-chloro imides such as trichlorocyanuric and tribromocyanuric acid, dibromo and dichlorocyanuric acid, and potassium and sodium salts thereof, N-brominated and N-chlorinated succinimide, malonimide, phthalimide and naphthalimide. Also suitable are hydantoins, such as dibromo and dichlorodimethylhydantoin, chlorobromo-dimethylhydantoin, N-chlorosulfamide (haloamide) and chloramine (haloamine). Particularly preferred in this invention is sodium hypochlorite having the chemical formula NaOCl, in an amount ranging from about 0.1 weight percent to about 10 weight percent, more preferably about 0.2% to 5%, and most preferably about 0.5% to 3%.

Under certain conditions, it is important to minimize or avoid the presence of salts, such as sodium chloride, which contribute to ionic strength within the compositions. The hypochlorite would thus preferably be selected or formed in a manner to avoid the presence of such undesirable salts. For example, hypochlorite bleaches are

WO 95/08619

PCT/US94/08190

commonly formed by bubbling chlorine gas through liquid sodium hydroxide or corresponding metal hydroxide to result in formation of the corresponding hypochlorite. However, such reactions commonly result in formation of a salt such as sodium chloride.

5

The present invention thus preferably uses hypochlorites formed for example by reaction of hypochlorous acid with sodium hydroxide or other metal hydroxides in order to produce the corresponding hypochlorite with water as the only substantial by-product. Sodium hypochlorite bleach produced in this manner is referred to as
10 "high purity, high strength" bleach and is available from a number of sources, for example Olin Corporation which produces sodium hypochlorite bleach as a 30% solution in water. The resulting solution is then diluted to produce the hypochlorite composition of the present invention.

15 The hypochlorite may be formed with other alkaline metals as are well known to those skilled in the art. Although the term "hypochlorite" is employed herein, it is not intended to limit the invention only to the use of chloride compounds but is also intended to include other halides or halites, as discussed in greater detail below. Generally, the present invention preferably uses potassium hypochlorite and sodium
20 hypochlorite produced by the high strength bleach process. To be avoided or minimized is a hypochlorite of any alkali metal including a chloride salt of the corresponding alkali metal. Here again, hypohalites formed with similar alkaline metals are similarly to be minimized. Furthermore, it is especially desirable that the hypochlorite of the invention either avoids the inclusion of a chloride salt as noted
25 above or includes such a chloride salt only within a range of up to about 5% by weight of the composition. As the hypochlorite component is increased from about 1% by weight of the composition, the chloride salt should be even further reduced since the chloride salt, particularly in the presence of the hypochlorite component, makes it difficult to achieve desirable thickening of the composition, or stability.

30

The hypochlorite and any salt present within the composition are also the principal source of ionic strength for the composition. The ionic strength of the composition

WO 95/08619

PCT/US94/08190

has an effect on thickening, that is, if the percentage of salt as noted above is exceeded, it becomes difficult to achieve desirable thickening in the composition. Moreover, high ionic strength may be detrimental to the stability of the composition as it can cause collapse of the polymer structure. In summary, the ionic strength of the compositions of the present invention is maintained preferably less than about 5M, more preferably less than about 3M. It is to be noted, however, that control of ionic strength is an additional avenue by which viscosity and rheology can be controlled, if desired. In general, increasing ionic strength decreases viscosity, but also contributes to a more plastic and less shear-thinning rheology.

10

Method of Preparing

Addition order is important to developing the desired viscosity and to enable the polyacrylate/nonionic system to maintain the viscosity over time. In the preferred process water, nonionic surfactant, and pH adjusting agent are mixed in a suitable vessel, with stirring. An unthickened alkaline solution results. If an anionic surfactant is to be included, it is added at this initial step. In a separate step, an aqueous slurry of calcium carbonate is made and allowed to degas. To the alkaline solution the calcium carbonate slurry is added slowly with continued mixing. Agitation of the mixture is to be avoided. The solution is allowed to degas, and the polyacrylate is added as an aqueous dispersion. Immediate thickening is observed, and at this point the solution already exhibits good phase stability, as indicated by uniformity of the solution. Adjuncts such as fragrances should be emulsified by the surfactant(s) and added prior to polymer addition. Finally, mixing speed and duration may be adjusted as necessary to incorporate any adjuncts.

WO 95/08619

PCT/US94/08190

**EXPERIMENTAL
FORMULATION EXAMPLE**

EXAMPLE 1	
Ingredient	Wt. % Range
Cross-linked polyacrylate	0.1 - 2%
Nonionic surfactant	0.1 - 10%
Anionic surfactant	0 - 10%
pH adjusting agent	0.1 - 1%
Hydrotrope	0 - 1%
Abrasive	5 - 60%
Adjuncts	0 - 10%
Water	Balance
	100%

EXAMPLE 2	
Ingredient	Wt. %
Cross-linked polyacrylate	0.3
LAS	1.0
Amine Oxide	0.5
NaOH	0.5
CaCO ₃ abrasive	40
Adjuncts	0.2
Water	Balance
	100%

WO 95/08619

PCT/US94/08190

Figure 1 shows viscosity stability of a formulation made up in accordance with Example 2 above. A sample of the formulation was held for the indicated time and temperatures and viscosities measured using a Brookfield RVT viscometer, using a No. 5 spindle, at 5 rpm and 5° C. Excellent viscosity stability is demonstrated across the range of temperatures.

Table 3 below shows viscosity development and phase stability for formulations made up according to Example 2 but with varying levels of polymer as indicated. It can be seen that using 0.5% amine oxide, good syneresis stability is attained at 0.25 weight percent polymer, or a ratio of polymer:amine oxide of 0.5.

Table 3

Effect of Amine Oxide:Polymer
on Phase Stability

Polymer	Polymer: Amine Oxide	Syneresis Stability	Viscosity ⁽¹⁾ (P)
.20	0.4	Poor	Unstable
.25	0.5	Good	200
.30	0.6	Good	250
.35	0.7	Good	280
.40	0.8	Good	310
.45	0.9	Good	350

(1) Initial viscosity, in Poise, was measured using a Brookfield RVT rheometer at 21° C, spindle No. 5 at 5 rpm.

Viscosity stability for four different formulations of the present invention is shown in Table 4 below. In this study, two different CARBOPOLs were compared, as were two levels of pH adjusting agents, over time during storage at 49° C. The four formulations were compared to a control comprising a commercially available surfactant thickened abrasive cleanser formulation. It can be seen that the two formulations using the preferred CARBOPOL 613 rapidly developed the highest

WO 95/08619

PCT/US94/08190

viscosity and maintained excellent viscosity stability over the duration of the study. The two formulations made up using the less preferred CARBOPOL 614, while developing much higher viscosity than the control, were nonetheless slower to develop the levels of viscosity and did not reach as high a level of viscosity as the preferred CARBOPOL 613. It can also be seen that the two formulations using excess pH adjusting agent developed higher viscosities than the two formulations wherein the pH adjusting agent was added stoichiometrically with the polymer. This shows that complete neutralization of the polymer is necessary to achieve the highest viscosity, and the slight excess appears to be necessary since a portion of the pH adjusting agent reacts with other acidic moieties in the formulation. The formulations of Table 4 included 0.4% polymer, 0.9% nonionic surfactant, 30% calcium carbonate abrasive, 1.1% sodium hypochlorite, 0.8% sodium laurate, 0.8% sodium silicate, 1.7% SAS, 0.5% SXS and the indicated levels of sodium hydroxide (either no excess, or 0.63% excess based on stoichmetric addition of 0.6% for 0.4% polymer). It should be noted that too much excess pH adjusting agent, i.e. too high a pH, can contribute to ionic strength thus can reduce viscosity.

Table 4

**Effect of Polymer Type and Degree of Neutralization
on Viscosity Stability**

Time (Days)	Viscosity ⁽¹⁾ (P)				
	Polymer Type/NaOH Level				
	Control	613 no excess	613 excess	614 no excess	614 excess
0	168	204	210	170	168
4	NA	NA	NA	138	164
7	188	418	434	152	182
13	224	434	461	NA	NA
17	NA	NA	NA	324	370
24	244	434	461	338	402

(1) Viscosity, in Poise, was measured using a Brookfield RVT rheometer at 21° C, spindle No. 5 at 5 rpm.

WO 95/08619

PCT/US94/08190

Results of a phase stability study are shown in Table 5 below, using the same formulations as in Table 4, except hypochlorite was omitted. Again, it can be seen that the preferred CARBOPOL 613 formulation with 0.63% excess sodium hydroxide exhibited no measurable syneresis over the duration of the study.

Table 5

Effect of Polymer Type and Degree of Neutralization
on Phase Stability

Time (Days)	Percent Syneresis				
	Polymer Type/NaOH Level				
	Control	613 no excess	613 excess	614 no excess	614 excess
0	0	0	0	0	0
3	4	0	0	1	2
7	9	3	0	3	7
10	13	7	0	4	8
17	16	7	0	4	8

- 20 The effect of a hydrotrope is shown in Table 6 below on a composition comprising 0.4% CARBOPOL 613, 0.9% amine oxide, 30% calcium carbonate abrasive, 0.6% sodium hydroxide, 1.1% sodium hypochlorite, 0.8% sodium laurate, 1.7% SAS, and 0.8% sodium silicate. Formula A omits sodium xylene sulfonate, and Formula B is the same formulation with 0.5% sodium xylene sulfonate. Again, the formulations
- 25 were made up and held at 49° C over a period of two weeks with viscosities tested periodically. It is evident that Formula B, with the sodium xylene sulfonate, exhibits excellent viscosity stability compared to Formula A having no sodium xylene sulfonate.

WO 95/08619

PCT/US94/08190

TABLE 6

Effect of Hydrotrope on Viscosity

Time (Days)	Viscosity ⁽¹⁾ (P)	
	A	B
0	244	250
4	420	216
8	488	249
14	190	240
16	51	200

(1) Viscosity, in Poise, was measured using a Brookfield RVT rheometer at 21° C, spindle No. 5 at 5 rpm.

It can be seen that the presence of a hydrotrope in a formulation containing a secondary alkane sulfonate surfactant results in better viscosity stability. It is expected that the viscosity will remain stable over a typical shelf and storage life of the product.

Table 7 below is a polymer screening study showing viscosity development during storage at 49° C for four polymers. The formulations of Fig. 5 included 0.4% polymer, 1.1% sodium hypochlorite, 30% calcium carbonate, 0.6% sodium hydroxide, and 0.9% nonionic surfactant. Polymer A was CARBOPOL 613; Polymer B was CARBOPOL 614; Polymer C and D were non-cross linked PA 805 and PA 1105, respectively. The control formula was a commercially-available, colloiddally-thickened cleanser.

WO 95/08619

PCT/US94/08190

TABLE 7

Effect of Polymer on Viscosity

Time (Days)	Viscosity ⁽¹⁾ (P)				
	Polymer				
	Control	A	B	C	D
0	160	220	180	140	150
6	159	400	360	160	190
12	161	680	400	180	240
20	158	410	300	120	170
24	164	310	200	110	130

(1) Viscosity, in Poise, was measured using a Brookfield RVT rheometer at 2° C, spindle No. 5 at 5 rpm.

Table 7 demonstrates the superior viscosity development of the cross-linked CARBOPOL 613 and 614 polymers "A" and "B" respectively. The non-cross-linked PA products did not develop significant viscosity compared to the control formulation.

Performance Evaluation

A rinsing performance test was conducted to evaluate rinsability of the formulation of the present invention. In the test, two inches wide of the material was deposited onto a black ceramic tile substrate, set at a 45-degree angle, to form a 350 micron film. Immediately thereafter, rinse water was directed onto the material, at flow rate of 2.4 l/min. through an orifice having an 8 x 2 mm. nozzle. Rinse time was evaluated by visually determining when all material had been removed. The formulation tested was as shown in Example 2. A commercially available surfactant thickened cleanser was used as a control. Four replicates of each cleanser were tested. Average rinse time for the cleanser of the present invention was twenty-eight seconds, compared to an average of one hundred and eighteen seconds for the control. When scouring a test surface with a sponge, little or no foam residue was

WO 95/08619

PCT/US94/08190

observed on the surface after rinsing, and only minimal foam residue remained on the sponge.

- 5 Cleaning performance results show that the enhanced viscosity stability afforded by the formulation of the present invention does not significantly degrade cleaning performance compared to a surfactant-thickened control.

- 10 Review of the foregoing experimental data shows that the compositions of the invention have good viscosity and phase stability and maintain this advantageous feature over extended times and at elevated temperatures. Concurrently with these rheological advantages the cleaning performance of the formulation of the present invention is at least as good as any of the leading commercial products, over a wide range of soils.

- 15 The above examples have been depicted solely for purposes of exemplification and are not intended to restrict the scope or embodiments of the invention. The invention is further illustrated with reference to the claims which follow hereto.

WO 95/08619

PCT/US94/08190

What is claimed is:

1. A thickened liquid abrasive cleanser with enhanced phase and viscosity stability comprising, in aqueous solution:
 - (a) a cross-linked polyacrylate;
 - (b) at least one nonionic surfactant;
 - 5 (c) a pH adjusting agent; and
 - (d) a calcium carbonate abrasive.
2. The cleanser of claim 1 wherein:
the polyacrylate has a molecular weight of 80,000 - 7,000,000 g/mole and a pH of a 2% solution at 21° C of between 1.8 and 5.
3. The cleanser of claim 1 wherein:
the nonionic surfactant is an amine oxide, an alkoxylated alcohol, or a mixture thereof.
4. The cleanser of claim 3 wherein:
the amine oxide is a C₁₄₋₁₆ dimethyl amine oxide.
5. The cleanser of claim 1 wherein:
the pH adjusting agent is an alkali-metal hydroxide.
6. The cleanser of claim 1 wherein:
the abrasive has an average particle size of about ten to eight hundred microns.
7. The cleanser of claim 1 and further including:
a cosurfactant selected from the group consisting of linear alkylaryl sulfonates;
secondary alkane sulfonates and mixtures thereof.

WO 95/08619

PCT/US94/08190

8. The cleanser of claim 1 and further including:
a stabilizing agent selected from the group consisting of soaps, hydrotropes, and mixtures thereof.
9. An aqueous hard surface cleanser without substantial syneresis comprising, in aqueous solution:
 - (a) a cross-linked polyacrylate thickener;
 - (b) a mixed surfactant system which comprises at least one anionic surfactant and at least one nonionic surfactant;
 - (c) a pH adjusting agent; and
 - (d) a particulate abrasive.
10. The cleanser of claim 9 wherein:
the polyacrylate has a molecular weight of 80,000 - 7,000,000 g/mole and a pH of a 2% solution at 21° C of between 1.8 and 5.
11. The cleanser of claim 9 wherein:
the nonionic surfactant is an amine oxide, an alkoxyated alcohol, or a mixture thereof.
12. The cleanser of claim 11 wherein:
the amine oxide is a C₁₄₋₁₆ dimethyl amine oxide.
13. The cleanser of claim 9 wherein:
the pH adjusting agent is an alkali-metal hydroxide.
14. The cleanser of claim 9 wherein:
the particulate abrasive is calcium carbonate.
15. The cleanser of claim 9 and further including:
a cosurfactant selected from the group consisting of linear alkylaryl sulfonates; secondary alkane sulfonates and mixtures thereof.

WO 95/08619

PCT/US94/08190

16. The cleanser of claim 9 and further including:
a stabilizing agent selected from the group consisting of soaps, hydrotropes, and mixtures thereof.
17. A method for making a thickened aqueous abrasive cleanser with enhanced phase and viscosity stability, the method comprising the steps of:
- (a) making an aqueous solution of nonionic surfactant and pH adjusting agent;
 - 5 (b) making a slurry of water and a calcium carbonate abrasive, and allowing the slurry to degas;
 - (c) adding the slurry of (b) to the solution of (a), slowly with gentle mixing and allowing the resultant mixture to degas; and
 - (d) adding a quantity of polyacrylate and any adjunct ingredients.
18. The method of claim 17 wherein:
the polyacrylate has a molecular weight of 80,000 - 7,000,000 g/mole and a pH of a 2% solution at 21° C of between 1.8 and 5.
19. The method of claim 17 wherein:
the nonionic surfactant is an amine oxide, an alkoxyated alcohol, or a mixture thereof.
20. The method of claim 19 wherein:
the amine oxide is a C₁₄₋₁₆ dimethyl amine oxide.
21. The method of claim 17 wherein:
the pH adjusting agent is an alkali-metal hydroxide.
22. The method of claim 17 wherein:
the abrasive has an average particle size of about ten to eight hundred microns.

WO 95/08619

PCT/US94/08190

23. The method of claim 17 wherein:
the adjuncts include alkylaryl sulfonates; secondary alkane sulfonates; stabilizing
agents; and mixtures thereof.

WO 95/08619

PCT/US94/08190

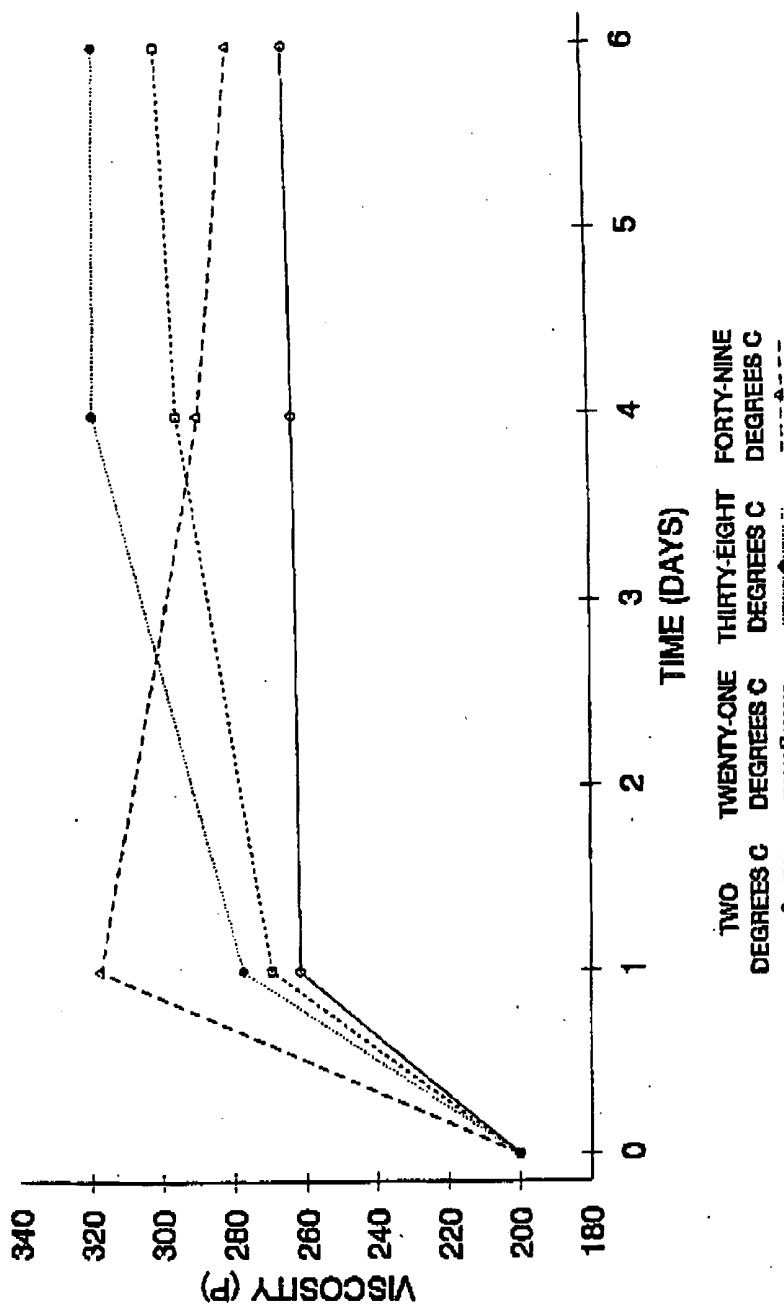


FIG. 1

1/1

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/08190

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : C11D 3/16

US CL : 252/99

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 252/99

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
APS, CAS ONLINE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y, P	US, A, 5,260,051 (CHO) 09 NOVEMBER 1993, column 12, lines 12-30.	1-23

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later documents published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

A document member of the same patent family

Date of the actual completion of the international search

02 NOVEMBER 1994

Date of mailing of the international search report

NOV 17 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOSEPH CONRAD

Telephone No. (703) 308-1235

Form PCT/ISA/210 (second sheet)(July 1992)*